

1RU Rack Enclosure.

The V1601 is intended for applications/areas where rack space is at a premium and only a small number of modules are required. The V1601 has capacity for up to 4 modules. Other 1U rack frames may boast up to 6 modules, however they are unable to accept multiple higher power or more complex processing modules as offered in the V1600 range. In addition, the power supply unit has an MTBF rating in excess of 500,000 hours.



FEATURES

- 19" rack mounting in 1RU
- Any combination and mix of up to 4 V1600 modules
- Hot swap of modules
- Cross-flow ventilation of all modules
- Remote control via DARTnet without loss of module space (using optional V6081 interface)

Technical Specification

Power

Line Voltage	90-132Vac & 185-265Vac (Selectable on side of chassis)
Line Frequency	45-66Hz
Input Power	Dependant on no. of modules fitted maximum 70W
Connector Type	IEC
Power Supply MTBF	>500,000 hours

Physical 1RU


Height	43.6mm
Depth	420mm
Width	449mm

Environmental

Operating Temperature	0° to 40°C
Storage Temperature	-10° to +70°C
Relative Humidity	0-95% non-condensing @ 40°C

Ordering Information

V1601	1RU Rack Enclosure with PSU
V1608	Controller Card for DARTnet interface (does not require internal slot)

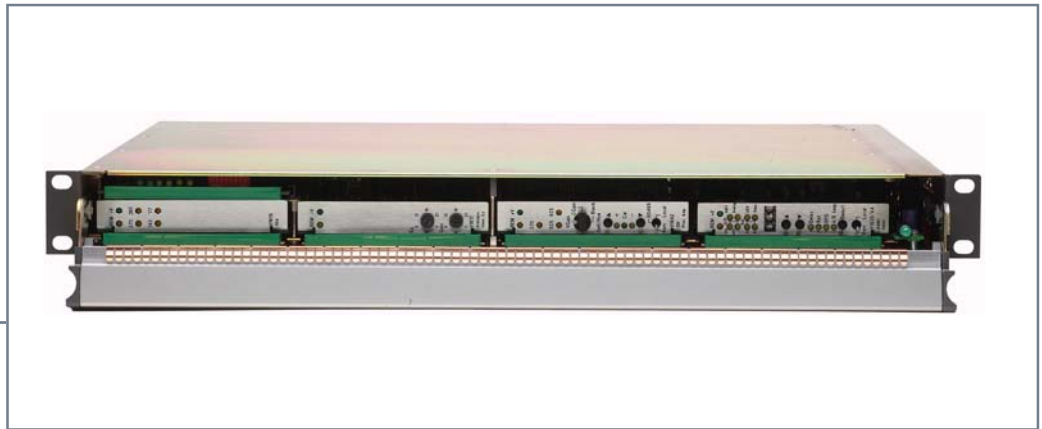

WWW.PRO-BEL.COM

UK
+44 (0) 1189 866 123

USA
+1 631 549 5159

France
+33 (0) 1 45 18 39 80

Hong Kong
+ 852 2891 9123

